

			TYPI	CAL M	EMBER	DIMEN	SIONS		·	
FENCE HEIGHT	LINE POSTS			END, LATCH & CORNER			BRACES			
	ROUND (1. D.)	н	ROLL FORMED	POSTS						
				ROUND (1.D.)	ROLL	FORMED	ROUND (1. D.)	Н	ROLL FORMED	
					C	N C			(T)	
6 and less	11/2"	1%x1%"	12"×12"	2"	3½°x3½	2"x14"	14	LX 1%	1%×1/4	12"x14"
Over 6'	2"	2 ¹ /4"x2"	2"x 1 ³ 4"	2 1/2"	3½x3½	2½×2½	1/4	16x17%	16x14	3/1×1/4"

GATE POST								
FENCE HEIGHT	GATE WIDTHS	NOMINAL I. D.	PER FOOT					
	Up thru6	2 ½"	4.95					
6'-0"and		4"	10.79					
less	Over I2, thru I8	5"	14.62					
	Over 18' to 24 max.	6"	18-97					
	Up thru 6'	3"	7.58					
Over	Over 6' thrui2'	5"	14.62					
6'	Over 12, thru 18	6"	18.97					
	Over 18' to 24 max.	8"	28.55					


NOTES:

1. Options exercised shall be uniform on any one project.

2. Dimensions shown are nominal,

3. Fence location shall be as shown indicated on the plans.

4. Gate post dimensions and weights are minimums. Larger sizes may be used on approval of engineer.

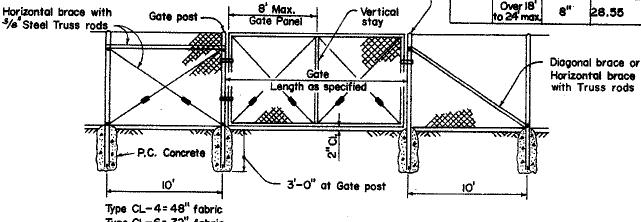

Type CL-6= 72" fabric

NOTE: THIS PLAN IS NOT A LEGAL ENGINEERING DOCUMENT BUT AN ELECTRONIC DUPLICATE THE SIGNED CITY OF OAKLAND STANDARD. DETAILS FOR PUBLIC WORKS CONSTRUCTION IS AVAILABLE FOR PURCHASE FROM THE CONTRACT ADMINISTRATION DEPARTMENT.

CITY OF OAKLAND

DESIGN AND CONSTRUCTION SERVICES DEPARTMENT

Latch



CHAIN LINK FENCE

ENGINEERING DESIGN MANAGER

DATE: JANUARY 2002 REV. DATE:

DWG. M-2